

BTA1103PE

Diesel Genset Powered by



Generating Rates

Service		Prime	Standby
Power	kVA	1025	1128
Power	kW	820	902,4
Current	(cos Phi=0,8) A	1476	1624,32
Standart Voltage	V	400/231	400/231
Revolution Per Minute	r.p.m	1500	1500
Rated At Power Factor	Cos Phi	0,8	0,8

Standart Features

- 4 stroke 1500RPM, water cooled heavy duty diesel engine
- Dry type replacable air filter
- Heatresistant radiator for 50 °C
- Flexible oil pipes and oil draining valve
- Preheater 4 poles synchrontype, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram User manual and operating manual
- Protection system on manual run
- Lubrication oil and anti – freeze

Optional Equipments

- Soundproof canopy
- Automatic transfer switch
- Circuit Breaker
- Trailer
- External fuel tank
- Electronic governor
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manual)
- Analog indicators
- 1 Phase 3 phase switch plugs
- Alarm system for fuel level
- Remote control and monitoring

Standby Power

Supplying of electrical power at variable load, in the event of normal utility power failure according to ISO85281. This rating is maximum power, no overload capability is available.

Prime Power

Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility powerfailure according to ISO85281. 10% over load capability is available.



Generating Rates

Service		Specifications
Manufacturer		PERKINS
Model		PERKINS4008TAG2
Cylinder Configuration		IN-LINE
No of Cylinders		8
Displacement		30,561
Bore		160
Stroke		190
Compression Ratio		13,6:1
Aspiration Type		Turbo-charged
Governor Type		Electronic
Cooling System		Water
Coolant Capacity	lt	162
Lubrication Oil Capacity	lt	165,6
Electrical System (DC)		24
Speed/ Frequency	rpm/Hz	1500/50
Engine Gross Power	kW	985
Fuel Consumption %110 ESP	lt/h	248
Fuel Consumption %100 ESP	lt/h	220
Fuel Consumption %75 ESP	lt/h	160
Fuel Consumption %50 ESP	lt/h	108
Exhaust Outlet Temperature	°C	500
Exhaust Gas Flow	m³/min	201
Combustion Air Flow	m³/min	75
Cooling Air Flow	m³/min	1200

Alternator Rates

Service	Specifications
No of Phases	3
Power Factor	0,8
No of Bearings	Single
No of Poles	4
No of Leads	6-12
Insulation Class	H
Degree of Protection	IP23
Excitation System	AVR



Control Panel Features

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs full snapshot
- Multiple Automatic test program
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V&I
- Harmonic analysis of V&I
- Synchroscope & check synch 16
- Amp MCB & GCB outputs 8 configurable digital outputs
- Outputs expandable to 40 4 configurable analog outputs
- Battery charge run enabled
- Weekly Operation Schedule
- Dual mutual standby with equal aging of gensets
- Manual speed fine adjust some ECU's
- Automatic fuel pumpcontrol
- Disable protection feature
- Excess protection power
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Waveform display of V&I
- Battery backup real time clock
- Idle speed control
- All parameters front panel editable
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Free configuration software
- Allow SMS controls
- Mobile genset support
- Automatic GSM geolocation
- GPS connectivity (USB & RS232)
- Modem & ethernet diagnostic
- Configurable through USB, RS485, Ethernet and GPRS
- Ready for central monitoring Ethernet and GPRS

Dimensions Without Canopy and Weight

Specifications

Width	mm	TBA
Length	mm	TBA
Height	mm	TBA
Weight	kg	TBA

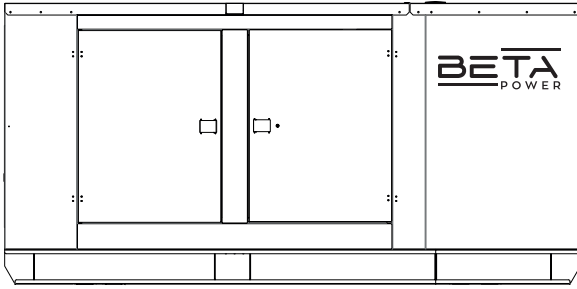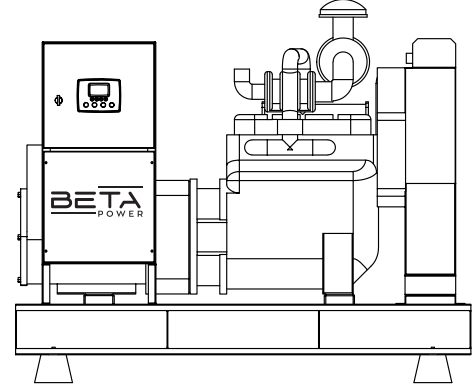

Dimensions With Canopy and Weight

Specifications

Width	mm	TBA
Length	mm	TBA
Height	mm	TBA
Weight	kg	TBA

