

BTA385PE

Diesel Genset Powered by



Generating Rates

Service		Prime	Standby
Power	kVA	350	385
Power	kW	280	308
Current	(cos Phi=0,8) A	504	554,4
Standart Voltage	V	400/231	400/231
Revolution Per Minute	r.p.m	1500	1500
Rated At Power Factor	Cos Phi	0,8	0,8

Standart Features

- 4 stroke 1500RPM, water cooled heavy duty diesel engine
- Dry type replacable air filter
- Heatresistant radiator for 50 °C
- Flexible oil pipes and oil draining valve
- Preheater 4 poles synchrontype, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram User manual and operating manual
- Protection system on manual run
- Lubrication oil and anti – freeze

Standby Power

Supplying of electrical power at variable load, in the event of normal utility power failure according to ISO85281. This rating is maximum power, no overload capability is available.

Prime Power

Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility powerfailure according to ISO85281. 10% over load capability is available.

Optional Equipments

- Soundproof canopy
- Automatic transfer switch
- Circuit Breaker
- Trailer
- External fuel tank
- Electronic governor
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manual)
- Analog indicators
- 1 Phase 3 phase switch plugs
- Alarm system for fuel level
- Remote control and monitoring



Generating Rates

Service		Specifications
Manufacturer		PERKINS
Model		PERKINS1706A-E93TAG2
Cylinder Configuration		IN-LINE
No of Cylinders		6
Displacement		9,29
Bore		115
Stroke		149
Compression Ratio		16,5:1
Aspiration Type		Turbo-charged
Governor Type		Electronic
Cooling System		Water
Coolant Capacity	lt	35,8
Lubrication Oil Capacity	lt	30
Electrical System (DC)		24
Speed/ Frequency	rpm/Hz	1500/50
Engine Gross Power	kW	342,5
Fuel Consumption %110 ESP	lt/h	78,4
Fuel Consumption %100 ESP	lt/h	71,3
Fuel Consumption %75 ESP	lt/h	54
Fuel Consumption %50 ESP	lt/h	37,3
Exhaust Outlet Temperature	°C	557,5
Exhaust Gas Flow	m³/min	50,7
Combustion Air Flow	m³/min	TBA
Cooling Air Flow	m³/min	TBA

Alternator Rates

Service	Specifications
No of Phases	3
Power Factor	0,8
No of Bearings	Single
No of Poles	4
No of Leads	6-12
Insulation Class	H
Degree of Protection	IP23
Excitation System	AVR


Control Panel Features

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs full snapshot
- Multiple Automatic test program
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V&I
- Harmonic analysis of V&I
- Synchroscope & check synch 16
- Amp MCB & GCB outputs 8 configurable digital outputs
- Outputs expandable to 40 4 configurable analog outputs
- Battery charge run enabled
- Weekly Operation Schedule
- Dual mutual standby with equal aging of gensets
- Manual speed fine adjust some ECU's
- Automatic fuel pumpcontrol
- Disable protection feature
- Excess protection power
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Waveform display of V&I
- Battery backup real time clock
- Idle speed control
- All parameters front panel editable
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Free configuration software
- Allow SMS controls
- Mobile genset support
- Automatic GSM geolocation
- GPS connectivity (USB & RS232)
- Modem & ethernet diagnostic
- Configurable through USB, RS485, Ethernet and GPRS
- Ready for central monitoring Ethernet and GPRS

Dimensions Without Canopy and Weight

Specifications

Width	mm	1200
Length	mm	3028
Height	mm	1701
Weight	kg	2631

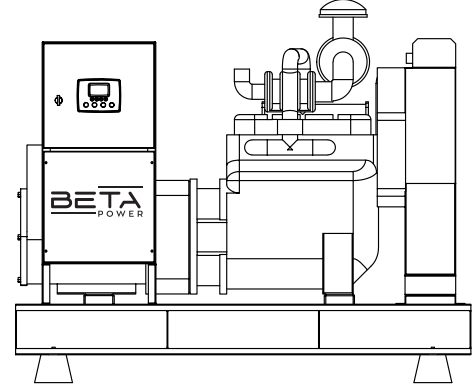

Dimensions With Canopy and Weight

Specifications

Width	mm	1200
Length	mm	4000
Height	mm	2030
Weight	kg	3116

