

BTA715SC

Diesel Genset Powered by

SCANIA

Generating Rates

Service		Prime	Standby
Power	kVA	650	715
Power	kW	520	572
Current	(cos Phi=0,8) A	936	1029,6
Standart Voltage	V	400/231	400/231
Revolution Per Minute	r.p.m	1500	1500
Rated At Power Factor	Cos Phi	0,8	0,8

Standart Features

- 4 stroke 1500RPM, water cooled heavy duty diesel engine
- Dry type replacable air filter
- Heatresistant radiator for 50 °C
- Flexible oil pipes and oil draining valve
- Preheater 4 poles synchrontype, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram User manual and operating manual
- Protection system on manual run
- Lubrication oil and anti – freeze

Optional Equipments

- Soundproof canopy
- Automatic transfer switch
- Circuit Breaker
- Trailer
- External fuel tank
- Electronic governor
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manual)
- Analog indicators
- 1 Phase 3 phase switch plugs
- Alarm system for fuel level
- Remote control and monitoring

Standby Power

Supplying of electrical power at variable load, in the event of normal utility power failure according to ISO85281. This rating is maximum power, no overload capability is available.

Prime Power

Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility powerfailure according to ISO85281. 10% over load capability is available.



Generating Rates

Service	Specifications
Manufacturer	SCANIA
Model	DC16093A 02-54
Type	4 Stroke
Stand-by Power	kW/m 614
Prime Power	kW/m 491
Cylinder Arrangement	8
Displacement	lt 16,4
Cooling System	Water Cooling
Bore x Stroke	mm 130x154
Compression Ratio	16,7:1
Aspiration	Turbocharger, Intercooler
Governor Type	Electronic
Electrical System	VDC 24
Lubricant Oil Capacity	lt 45
Coolant Capacity	lt 68
Frequency	Hz-rpm 50-1500
Jacket Water Heater	Piece x W 2x2000
Battery	Piece x AH 2x180
Charge Alternator Current	A 100
Injection System	Direct
Cooling Air Flow	m³/min TBA
Combustion Air Flow	m³/min TBA
Exhaust Gas Flow	m³/min TBA
Exhaust Gas Temperature	°C TBA
Fuel Consumption Under 100% Load	lt/h 130,9
Fuel Consumption Under 75% Load	lt/h 98
Fuel Consumption Under 50% Load	lt/h 66

Alternator Rates

Service	Specifications
Phase / Pole Number	3/4+
Excitation System	Self Excited, Brushless
Voltage Regulator	A.V.R
Voltage Regulation	±%1
Insulation Class	H
Protection Class	IP23
Connection Type	Star
Frequency	Hz 50
Power Factor	Cos Φ = 0,8
Total Harmonic Distortion (No Load)	< % 3.5
Output Voltage	VAC 231/400



Control Panel Features

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs full snapshot
- Multiple Automatic test program
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V&I
- Harmonic analysis of V&I
- Synchroscope & check synch 16
- Amp MCB & GCB outputs 8 configurable digital outputs
- Outputs expandable to 40 4 configurable analog outputs
- Battery charge run enabled
- Weekly Operation Schedule
- Dual mutual standby with equal aging of gensets
- Manual speed fine adjust some ECU's
- Automatic fuel pumpcontrol
- Disable protection feature
- Excess protection power
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Waveform display of V&I
- Battery backup real time clock
- Idle speed control
- All parameters front panel editable
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Free configuration software
- Allow SMS controls
- Mobile genset support
- Automatic GSM geolocation
- GPS connectivity (USB & RS232)
- Modem & ethernet diagnostic
- Configurable through USB, RS485, Ethernet and GPRS
- Ready for central monitoring Ethernet and GPRS

Dimensions Without Canopy and Weight

Specifications

Width	mm	1350
Length	mm	3360
Height	mm	2200
Weight	kg	3800

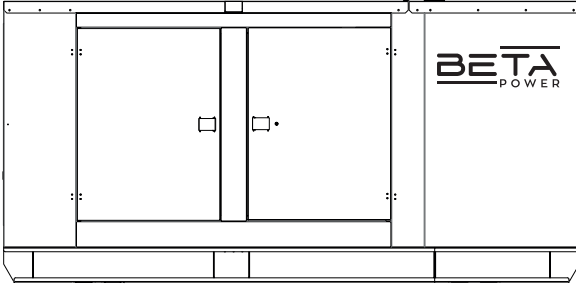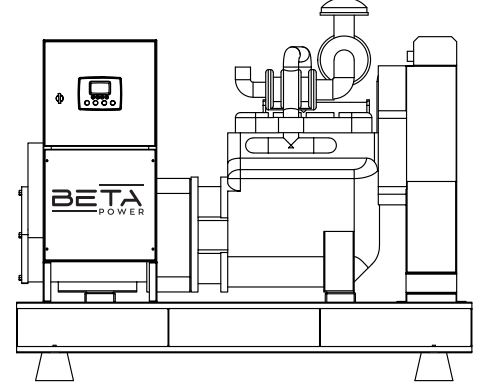

Dimensions With Canopy and Weight

Specifications

Width	mm	1600
Length	mm	4100
Height	mm	2550
Weight	kg	5280

